

W20 WATER SOLUBLE SOLDER PASTE

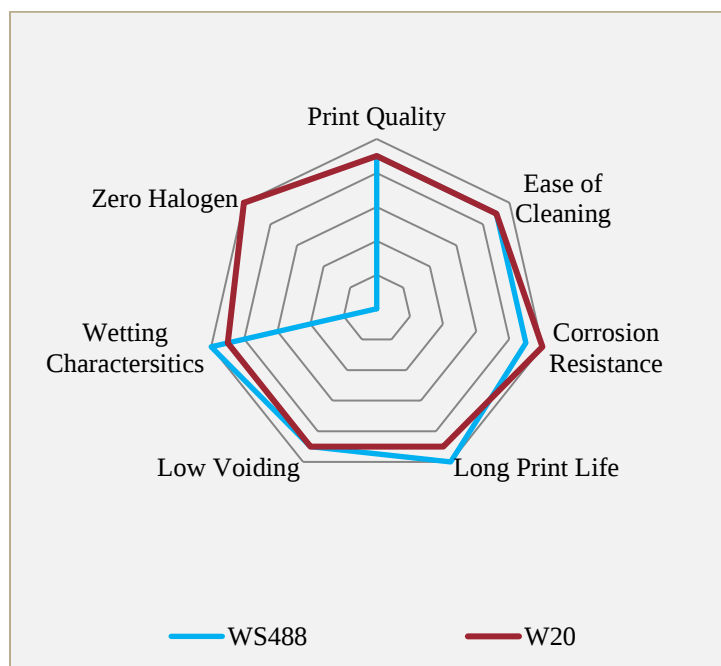
FEATURES

- Zero Halide/Halogen per J-STD-004/B
- RoHS Compliant*
- DI Water Wash
- Low Foaming
- Available in T4 and T5 powders sizes
- Extended Cleaning Window of 2+ Weeks
- 8+ Hour Stencil Life

DESCRIPTION

AIM's W20 water soluble solder paste is a zero halide/halogen flux formula. W20 has been engineered for enhanced wetting performance on all solderable electronic surfaces. W20 exhibits excellent print characteristics and 8+ hours of stencil life. W20 highly soluble residues are easily removed in plain water, even under low stand-off components. This all-purpose water soluble product was created to meet the industry's demand for a consistently reliable zero halogen water soluble solder paste.

CHARACTERISTICS



HANDLING & STORAGE

Parameter	Time	Temperature
Sealed Refrigerated Shelf Life	6 Months*	0°C-12°C (32°F-55°F)
Sealed Unrefrigerated Shelf Life	2 Weeks*	< 25°C (< 77°F)

*T4 powder size. Contact AIM for T5 shelf-life information.

Do not add used paste to unused paste. Store used paste separately; keep unused paste tightly sealed with internal plug or end cap in place. After opening, solder paste shelf life is environment and application dependent. See AIM's paste handling guidelines for further information. Alloy and storage conditions may affect shelf life. Please refer to W20 Certificate of Analysis for product specific information.

CLEANING

Pre-Reflow: AIM DJAW-10 effectively removes W20 solder paste from stencils while in process. DJAW-10 can be hand applied or used in under stencil wipe equipment. DJAW-10 will not dry W20 and will enhance transfer properties. Do not over-apply DJAW-10. Do not apply DJAW-10 to stencil topside. Isopropanol (IPA) is not recommended in process, but may be used as a final stencil rinse.

Post-Reflow Flux Residue: AIM recommends W20 flux residue to be removed within 24 hours for optimal results but can be left on the board for up to 2 weeks. Cleaning can be performed in plain water between 50°C-60°C (120°F-140°F) following with a final rinse in DI water.

DISCLAIMER: The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to pai-aimsolder.com to review PAI-AIM's terms and conditions.

REFLOW PROFILE





Detailed profile information may be found at <http://www.aimsolder.com/reflow-profile-supplements>. Contact AIM for additional information.

PRINTING

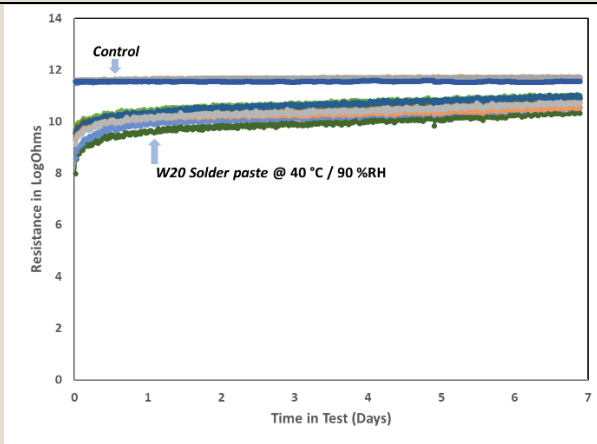
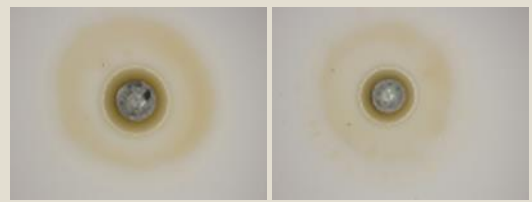
Recommended Initial Printer Settings - Dependent on PCB and Pad Design	
Parameter	Recommended Initial Settings
Squeegee Pressure	0.30-0.60 kg/cm (1.7- 3.4 lbs/In.) of blade
Squeegee Speed	25-120 mm/sec (1-4.7"/sec)
Snap-off Distance	On Contact 0.00 mm
PCB Separation Distance	0.75 - 2.0 mm
PCB Separation Speed	3-6 mm/sec

TEST DATA SUMMARY

Note: All test data is for T4 SAC305 formulation.

Name	Test Method	Results	
IPC Flux Classification	J-STD-004 3.3	ORM0	
IPC Flux Classification	J-STD-004B 3.3	ORM0	
Name	Test Method	Typical Results	Image
Copper Mirror	J-STD-004B 3.4.1.1 IPC-TM-650 2.3.32	MED = < 50% Breakthrough	@ 23 °C / 55 %RH
			 
Corrosion	J-STD-004B 3.4.1.2 IPC-TM-650 2.6.15	PASS	Before
			 
Halogen	J-STD-004B 3.5.4 EN 14582	400 ppm Typical	Halogen Free
Quantitative Halides	J-STD-004B 3.4.1.3 IPC-TM-650 2.3.28.1	200 ppm Typical	Halide Free

DISCLAIMER The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to pai-aimsolder.com to review PAI-AIM's terms and conditions.

Name	Test Method	Typical Results	Image
Qualitative Halides, Silver Chromate	J-STD-004 3.5.1.1 IPC-TM-650 2.3.33	None Detected	
Qualitative Halides, Fluoride Spot	J-STD-004B 3.5.1.2 IPC-TM-650 2.3.35.1	No Fluoride	
Surface Insulation Resistance	J-STD-004B 3.4.1.4 IPC-TM-650 2.6.3.7	PASS, All measurements on test patterns exceed 100 MΩ	
Acid Value Determination	J-STD-004B 3.4.2.2 IPC-TM-650 2.3.13	54.2 mgKOH/g flux Typical	
Viscosity (Brookfield)	J-STD-004B 3.4.2.4 IPC-TM-650 2.4.34	500 - 800 kcps Typical	
Viscosity (Malcolm)	J-STD-004B 3.4.2.4 IPC-TM-650 2.4.34	150 – 210 Pa.s Typical	
Visual	J-STD-004B 3.4.2.5	PASS	
Slump	J-STD-005A 3.6 IPC-TM-650 2.4.35	PASS	
Solder Ball	J-STD-005A 3.7 IPC-TM-650 2.4.43	PASS	

DISCLAIMER The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to pai-aimsolder.com to review PAI-AIM's terms and conditions.



Tack	J-STD-005A 3.8 IPC-TM-650 2.4.44	43.8 gf Typical	The scatter plot shows tack values over an 8-hour period. The y-axis is 'Tack (gF)' from 30 to 70. The x-axis is 'Time in Test (hours)' from 0 to 8. Data points are approximately: (0, 50), (2, 53), (4, 46), (6, 51), (8, 49). The title is 'W20 SAC305 88.5-T4'. <table><tr><th>Time in Test (hours)</th><th>Tack (gF)</th></tr><tr><td>0</td><td>50</td></tr><tr><td>2</td><td>53</td></tr><tr><td>4</td><td>46</td></tr><tr><td>6</td><td>51</td></tr><tr><td>8</td><td>49</td></tr></table>	Time in Test (hours)	Tack (gF)	0	50	2	53	4	46	6	51	8	49
Time in Test (hours)	Tack (gF)														
0	50														
2	53														
4	46														
6	51														
8	49														
Wetting	J-STD-005A 3.9 IPC-TM-650 2.4.45	PASS													

*For reference only. Not to be used as incoming product specifications.

DISCLAIMER The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to pai-aimsolder.com to reveiw PAI-AIM's terms and conditions.